

# InnovoltPro Series

## SERVICE OVERVIEW


The InnovoltPro Series helps decrease the downtime associated with power disturbances by protecting electronic equipment from these harmful anomalies.

## CORE PROTECTION

The InnovoltPro Series provides industry-leading protection against AC line surges, the most harmful type of power disturbance. The InnovoltPro Series also provides telephone/fax and network surge protection.

The InnovoltPro Series adds protection against all other types of power disturbances and includes our patented nuisance trip reduction technology.

## THE FREQUENCY OF POWER DISTURBANCES

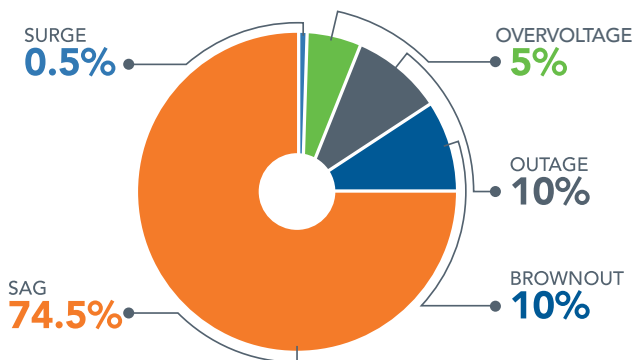

Source: I-Grid Power Monitoring System

## BENEFITS TO YOU

- Significantly reduces downtime of key electronic equipment
- Maximizes equipment reliability, performance and lifespan

	InnovoltPro 208	InnovoltPro 30
AC Line Surge Protection	✓	✓
Tele/Fax Surge Protection	✓	✗
Network Surge Protection	✓	✓
Over Voltage Protection	✓	✓
Brownout Protection	✓	✓
Blackout Protection	✓	✓
Nuisance Trip Reduction	✓	✓
Voltage Sag Protection	✓	✓
MOV Notification	✓	✓
LCD Screen	✓	✗

## DIVERSE ASSET PROTECTION

- MFPs
- Production Print Equipment
- Plant & Manufacturing Equipment
- Laboratory Devices
- Tanning Beds
- Floor Buffers


# InnovoltPro Series Hardware Specifications

## INNOVOLTPRO 208


PM15-20-208	<ul style="list-style-type: none"> <li>Large Office MFP or Print Production</li> </ul>																	
SPECIFICATIONS:																		
TEL / DATA:	<table border="1"> <thead> <tr> <th>PARAMETER</th> <th>TEL</th> <th>DATA</th> </tr> </thead> <tbody> <tr> <td>Connector</td> <td>RJ11</td> <td>RJ45 (CAT5E)</td> </tr> <tr> <td>Clamping Voltage</td> <td>230 Vac - 250Vac</td> <td>5 Vac - 15 Vac</td> </tr> <tr> <td>Protected Lines</td> <td>L1 - G / L2 - G</td> <td>ALL</td> </tr> </tbody> </table>	PARAMETER	TEL	DATA	Connector	RJ11	RJ45 (CAT5E)	Clamping Voltage	230 Vac - 250Vac	5 Vac - 15 Vac	Protected Lines	L1 - G / L2 - G	ALL					
PARAMETER	TEL	DATA																
Connector	RJ11	RJ45 (CAT5E)																
Clamping Voltage	230 Vac - 250Vac	5 Vac - 15 Vac																
Protected Lines	L1 - G / L2 - G	ALL																
ELECTRICAL:	<table border="1"> <thead> <tr> <th>PARAMETER</th> <th>PM20-208/240</th> </tr> </thead> <tbody> <tr> <td>Nominal Operating Voltage</td> <td>208/240 Vac, 60 Hz</td> </tr> <tr> <td>Over Voltage Limit</td> <td>&gt; 288 Vac</td> </tr> <tr> <td>Under Voltage Limit</td> <td>&lt; 156 Vac</td> </tr> <tr> <td>Maximum Continuous Current</td> <td>20A</td> </tr> <tr> <td rowspan="4">Voltage Surge per UL 1449</td> <td>4200 Joules</td> </tr> <tr> <td>1000 Vac L-N</td> </tr> <tr> <td>800 Vac L-G</td> </tr> <tr> <td>800 Vac N-G</td> </tr> <tr> <td>Current Surge Limit</td> <td>&lt; 20A</td> </tr> </tbody> </table>	PARAMETER	PM20-208/240	Nominal Operating Voltage	208/240 Vac, 60 Hz	Over Voltage Limit	> 288 Vac	Under Voltage Limit	< 156 Vac	Maximum Continuous Current	20A	Voltage Surge per UL 1449	4200 Joules	1000 Vac L-N	800 Vac L-G	800 Vac N-G	Current Surge Limit	< 20A
PARAMETER	PM20-208/240																	
Nominal Operating Voltage	208/240 Vac, 60 Hz																	
Over Voltage Limit	> 288 Vac																	
Under Voltage Limit	< 156 Vac																	
Maximum Continuous Current	20A																	
Voltage Surge per UL 1449	4200 Joules																	
	1000 Vac L-N																	
	800 Vac L-G																	
	800 Vac N-G																	
Current Surge Limit	< 20A																	

## INNOVOLTPRO 30


PM30	<ul style="list-style-type: none"> <li>Production Level</li> <li>Locking and Non-locking Plugs</li> </ul>																	
SPECIFICATIONS:																		
TEL / DATA:	<table border="1"> <thead> <tr> <th>PARAMETER</th> <th>TEL</th> <th>DATA</th> </tr> </thead> <tbody> <tr> <td>Connector</td> <td>RJ11</td> <td>RJ45 (CAT5E)</td> </tr> <tr> <td>Clamping Voltage</td> <td>230 Vac - 250Vac</td> <td>5 Vac - 15 Vac</td> </tr> <tr> <td>Protected Lines</td> <td>L1 - G / L2 - G</td> <td>ALL</td> </tr> </tbody> </table>	PARAMETER	TEL	DATA	Connector	RJ11	RJ45 (CAT5E)	Clamping Voltage	230 Vac - 250Vac	5 Vac - 15 Vac	Protected Lines	L1 - G / L2 - G	ALL					
PARAMETER	TEL	DATA																
Connector	RJ11	RJ45 (CAT5E)																
Clamping Voltage	230 Vac - 250Vac	5 Vac - 15 Vac																
Protected Lines	L1 - G / L2 - G	ALL																
ELECTRICAL:	<table border="1"> <thead> <tr> <th>PARAMETER</th> <th>PM30-240L/PM30-240N</th> </tr> </thead> <tbody> <tr> <td>Nominal Operating Voltage</td> <td>240 Vac, 60 Hz</td> </tr> <tr> <td>Over Voltage Limit</td> <td>&gt; 288 Vac</td> </tr> <tr> <td>Under Voltage Limit</td> <td>&lt; 180 Vac</td> </tr> <tr> <td>Maximum Continuous Current</td> <td>30A</td> </tr> <tr> <td rowspan="4">Voltage Surge per UL 1449</td> <td>4200 Joules</td> </tr> <tr> <td>1000 Vac L-N</td> </tr> <tr> <td>800 Vac L-G</td> </tr> <tr> <td>800 Vac N-G</td> </tr> <tr> <td>Current Surge Limit</td> <td>&lt; 30A</td> </tr> </tbody> </table>	PARAMETER	PM30-240L/PM30-240N	Nominal Operating Voltage	240 Vac, 60 Hz	Over Voltage Limit	> 288 Vac	Under Voltage Limit	< 180 Vac	Maximum Continuous Current	30A	Voltage Surge per UL 1449	4200 Joules	1000 Vac L-N	800 Vac L-G	800 Vac N-G	Current Surge Limit	< 30A
PARAMETER	PM30-240L/PM30-240N																	
Nominal Operating Voltage	240 Vac, 60 Hz																	
Over Voltage Limit	> 288 Vac																	
Under Voltage Limit	< 180 Vac																	
Maximum Continuous Current	30A																	
Voltage Surge per UL 1449	4200 Joules																	
	1000 Vac L-N																	
	800 Vac L-G																	
	800 Vac N-G																	
Current Surge Limit	< 30A																	




NEMA L6-30R



NEMA L6-30P



NEMA 6-30R



NEMA 6-30P